


# Odorox® IDU™ - Induct Unit

## Product Specifications

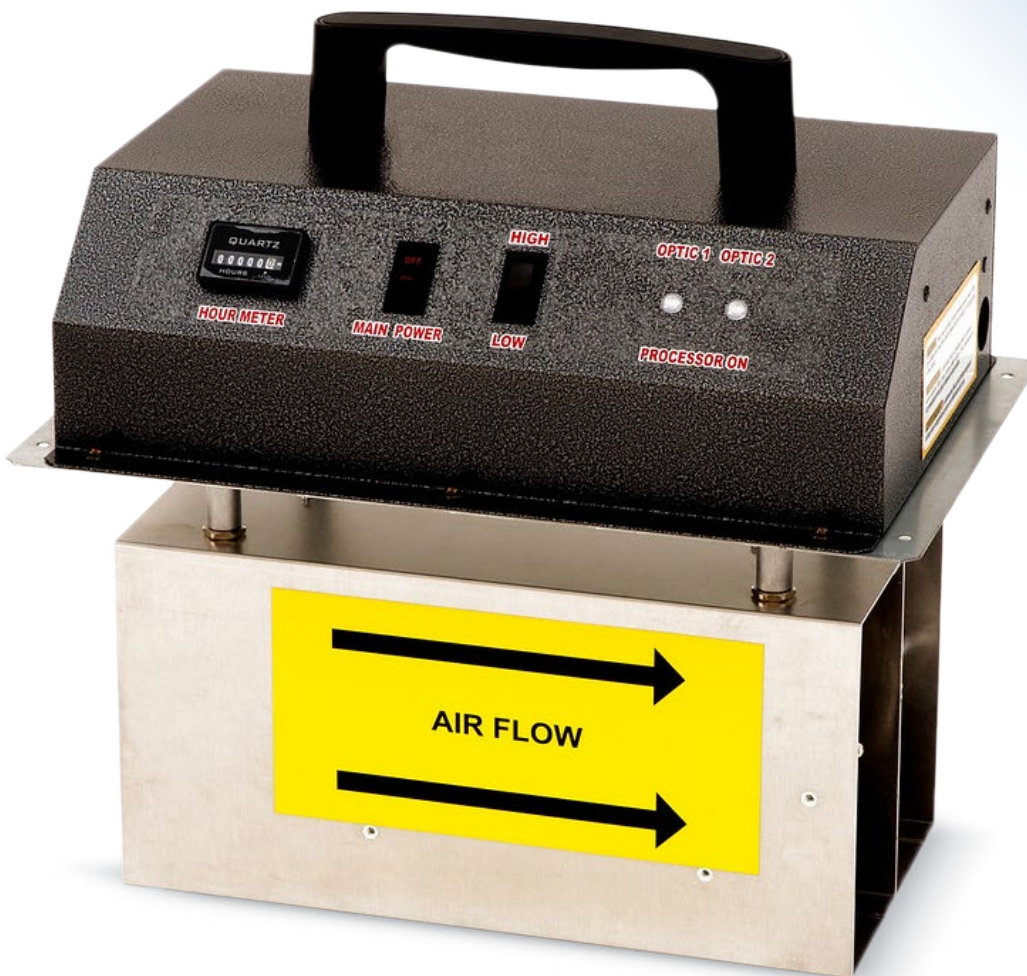

# IDU™ Induct Unit

The IDU™ series can be used in medical, senior living, office, retail and other commercial, scholastic or hospitality use. It is equipped with two hydroxyl generating optics, and designed for continuous operation.

The IDU™ series comes in three models, depending on the volume of the treatment space. The table below summarizes the treatment area range for each model. These guidelines should be adhered to for optimal performance and safety.

Model #	Part #	Optimal Area
IDU™ - IDU02 model	0819355020300	300 ft <sup>2</sup> - 1,000 ft <sup>2</sup> (28 m <sup>2</sup> - 93 m <sup>2</sup> )
IDU™ - IDS02 model	0819355020324	1,000 ft <sup>2</sup> - 1,700 ft <sup>2</sup> (93 m <sup>2</sup> - 158 m <sup>2</sup> )
IDU™ - IDB02 model	0819355020331	1,700 ft <sup>2</sup> - 3,000 ft <sup>2</sup> (158 m <sup>2</sup> - 279 m <sup>2</sup> )

## Specifications

<b>Dimensions (LxWxD)</b>	14.5" x 9.63" x 14.35" [368mm x 245mm x 365mm]
<b>Weight</b>	13.47lbs [6.11kg]
<b>Voltage</b>	100 - 240V 50/60Hz
<b>Power</b>	100 Watts (Nominal)   195 Watts (Max)
<b>Meter</b>	Hour Meter
<b>Number of Optics</b>	2
<b>Shipping Dimensions</b>	16" x 16" x 16" [407mm x 407mm x 407mm]
<b>Shipping Weight</b>	17.5lbs [7.94kg]
<b>Certification</b>	ETL US/Canada, CE, RoHS, REACH
<b>Warranty</b>	2 years covering defects in workmanship or materials, but excluding spare parts and consumables

### Contact Us

[sales@pyure.com](mailto:sales@pyure.com)

1.561.735.3701

[www.pyure.com](http://www.pyure.com)

   @pyureco



Copyright 2021, The Pyure Company.  
Odorox® and IDU™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA.